


Clinching Unit HHP – RS **Fast-Clever-Ergonomic**



Features & Specifications

- Clinching possible in both directions with simple tool interchange
- Height-adjustable pillar allows ergonomic working level for individual operator
- Precise work with foot switch operation
- Full pneumatic - one air connection
- 35 kN pressure force
- Capable for Tog-L-Loc® round, Lance-N-Loc® rectangular and Oval Loc® oval joint clinch tooling
- Two Trigger – Release operations via foot pedal switches for easy handling:
 1. Closing and opening the upper jaw
 2. Power cycle to clinch
- Large opening width especially suitable for clinching HVAC products
- Safe repeatable power stroke
- Tightness class D of clinch points according to DIN EN 1507: 2006 possible

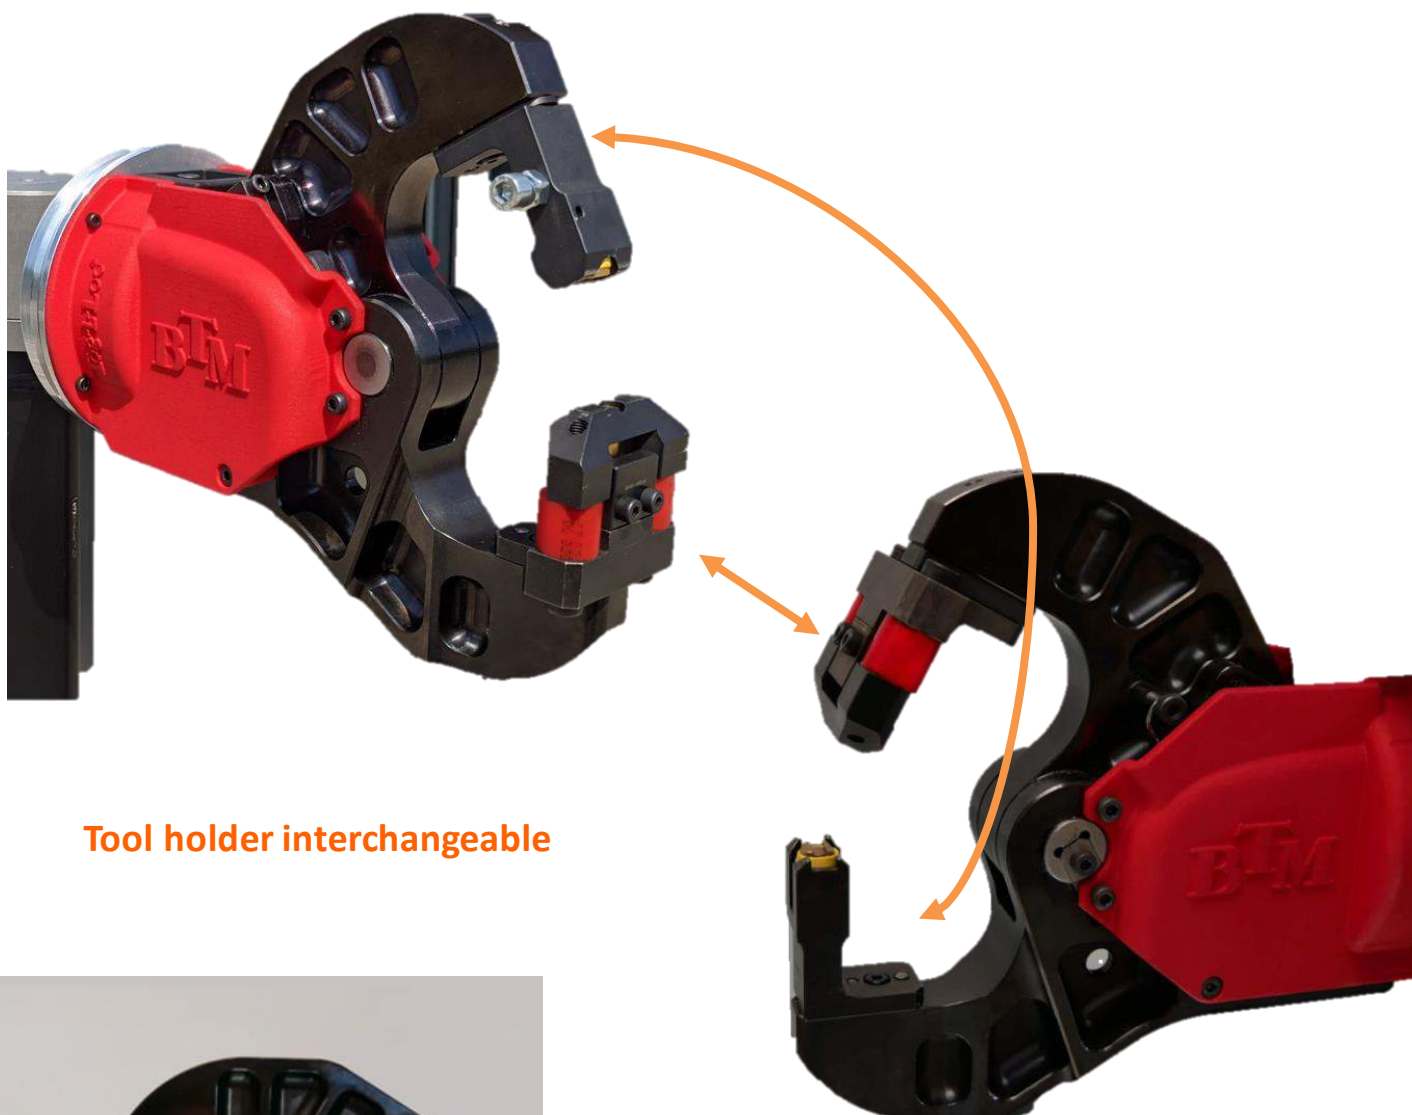

Tool holder interchangeable



Clinching Unit HHP – RS
Fast-Clever-Ergonomic