* Different sizes and variations on demand, please call BTM. 3D model on request!

Single Joint Clinch Unit SCU 442

Technical details:

Power supply: 6 bar comp. air

Force: 35 kN *

Power stroke: 8 mm by foot control

Advance

stroke: 55 mm by foot control

Opening: 63 mm *
Throat depth: 400 mm *
Weight: ca. 480 kg

Tooling size: up to Ø 4,6 mm Tog-L-Loc®


(round joint) and

□4,6 mm Lance-N-Loc®

(rectangular joint)

Total sheet

thickness: max. 5 mm Ram: anti-rotated

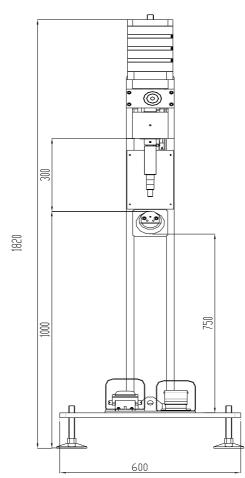

BTM Europe Blechverbindungstechnik GmbH Handwerkerstraße 6, D-59597 Erwitte Tel.:02943/9790-0, Fax:02943/979090 info@btm-europe.de
BTM Europe Blechverbindungstechnik GmbH Dieselstr. 27, D-77833 Ottersweier Tel.:07223/ 808393, Fax:07223/ 8083950 info-sued@btm-europe.de
www. BTM-Europe.de

2