


## Features & Specifications

- Full pneumatic – one air connection
- 35 kN pressure force
- Capable for Tog-L-Loc® round joint clinch tooling
- 2 trigger – one hand operation:
  1. Closing and opening the upper jaw
  2. Power cycle to clinch
- Large opening width especially suitable for clinching HVAC products
- Safe repeatable power stroke
- Built in pivot mechanism - turnable to 360°
- Easy handling
- Weight – 6,5 kg / 14 pounds
- Optimal weight design



# HHP – H1

## Hand Held Clinching Unit

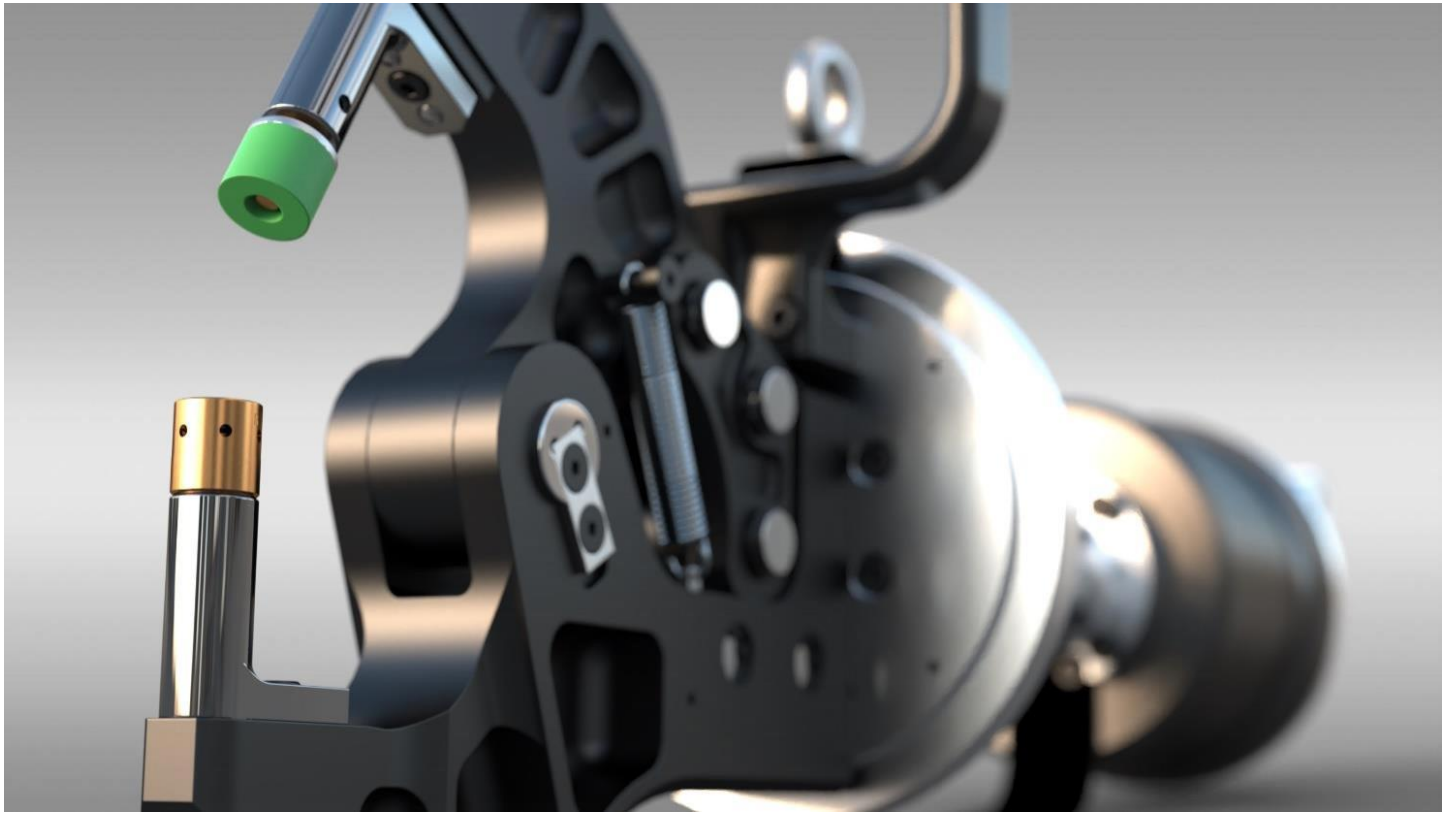

### **BTM [Europe] Blechverbindungstechnik GmbH**

Nord: Handwerkerstraße 6, D-59597 Erwitte  
Tel.: +49 (0) 2943-9790-0  
[www.btm-europe.de](http://www.btm-europe.de) · [info@btm-europe.de](mailto:info@btm-europe.de)

Süd: Am Fuchsgraben 13, D-77880 Sasbach  
Tel.: +49 (0) 7841-68136-0  
[www.btm-europe.de](http://www.btm-europe.de) · [info-sued@btm-europe.de](mailto:info-sued@btm-europe.de)